# Electronic vacuum/pressure switches Series SWCN



With digital display High precision, easy to use



- » Compact and lightweight
- » Digital indicator: precised electronic insertion with two separated switch outputs
- » Switching point and hysteresis can be programmed with a membrane keypad
- » Upper and lower limit values can be programmed through two PNP switch outputs

#### **APPLICATIONS:**

- electronic vacuum/pressure switch for safety monitoring, optimization of cycle times or energy saving devices; - it can be installed directly on the gripping point of a handling system; - setting of the limit vacuum value and continuous vacuum control; - perfectly suitable for customer needs.

ELECTRIC CONNECTION: the device is available with hardwired

cable of 2 meters or can be supplied with M8 connector. Accessories and extensions have to be

ordered separately. Codes can be found at the end of this section.


#### **GENERAL DATA**

Port Display LED Electric connection

Type of pressure/vacuum switch electronic with polycarbonate housing with external thread G1/8 and internal thread M5 3 digit display with membrane keypad for the values set up integrated LED indicators for switching state with M8 4-pole connector or pre-wired cable of 2 meters

2

CODING EXAMPLE							
SWCN	-	V01	-	P3	-	2	
SWCN	SERIES						
V01	SET PRESSURE RANGE: V01 = from -1 bar to 1 bar P10 = from 0 bar to 10 bar						
P3	TYPE OF ELECTRIC CONNECTION: P3 = 2 PNP outputs + 1 analog output 1 - 5 V DC (this version is available with 5-pole cable only) P4 = 2 PNP outputs						
2	ELECTRIC CONNECTION: 2 = cable of 2 meters M = M8 4 pin connector						

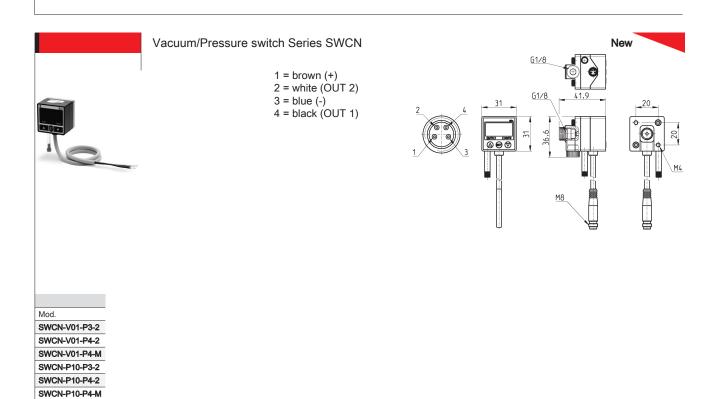



# **TECHNICAL DATA**

New


# CHARACTERISTICS

		SWCN-V01 SWCN-P10			
Rated pressure	range (set-value)	-1 ÷ 1 bar 0 ÷ 10 bar			
Setting pressure	range (it can be displayed on the screen)	-1 ÷ 1 bar -1 ÷ 10 bar			
Withstand (Maxi	mum) pressure	3 bar 15 bar			
Fluid		Air, non-corrosive gases, incombustible gases			
Set pressure rea	olution: kPa MPa Kgf/cm² bar Psi InHg mmHg mmH2O	0,1 - - 0,001 0,001 0,01 0,001 0,1 0,01 0,1 0,1 - 1 - 0,1 -			
Power supply vo		12-24 VDC ± 10%, ripple (P-P) 10% or less			
Current consum		≤ 55mA			
PNP switch outp	ut	2 outputs with open collector max. load current of 80mA max. power supply voltage of 24VDC residual voltage ≤ 1V (with load current of 80mA) ≤ ± 0,2% F.S. ± 1 digit			
Analog output (v	vhere foreseen)	1 - 5V ± 5% F.S. 1 - 5V ± 2,5% F.S. ((within the linearity range: ≤ ± 1% F.S.)			
Hysteresis:	Hysteresis mode Window comparator mode	Adjustable Fixed (3 digits)			
Response time		≤ 2,5ms (chattering-proof function: 24ms, 192ms and 768ms)			
Output short circ	uit protection	YES			
7 segment LED	display	3 ½ digit (sampling rate of 5 times/sec)			
Indicator accura	су	≤ ± 2% F.S. ± 1 digit (ambient temperature: 25 ± 3°C)			
Indicator		green LED (OUT1), red LED (OUT2)			
Environment:	Protection class	IP65			
	Temperature	Operation: 0 + 50°C Storage: -20 + 60°C (without condensation or freezing)			
	Relative humidity	Operation/Storage: 35 ÷ 85% (without condensation)			
	Withstand (Max.) voltage	1000 VAC in 1 min ((between case and lead wire)			
	Insulation resistance	$50 M \Omega$ min. (at 500VDC between case and lead wire)			
	Vibration	Total amplitude 1.5 mm 10Hz-55Hz-10Hz scan for 1 minute 2 hours each direction of X, Y and Z			
	Shock	980 m/s² (100G) 3 times each direction of X, Y and Z			
Changes due to	temperature	$\leq$ ± 2% F.S. of detected pressure (25°C) within the operating temperature range			
Port size		G1/8 - M5			
Lead wire		Oil-resistance cable(0,15 mm <sup>2</sup> )			
		About 105 g for the version with 2-meter lead wire			



2

CONTROL

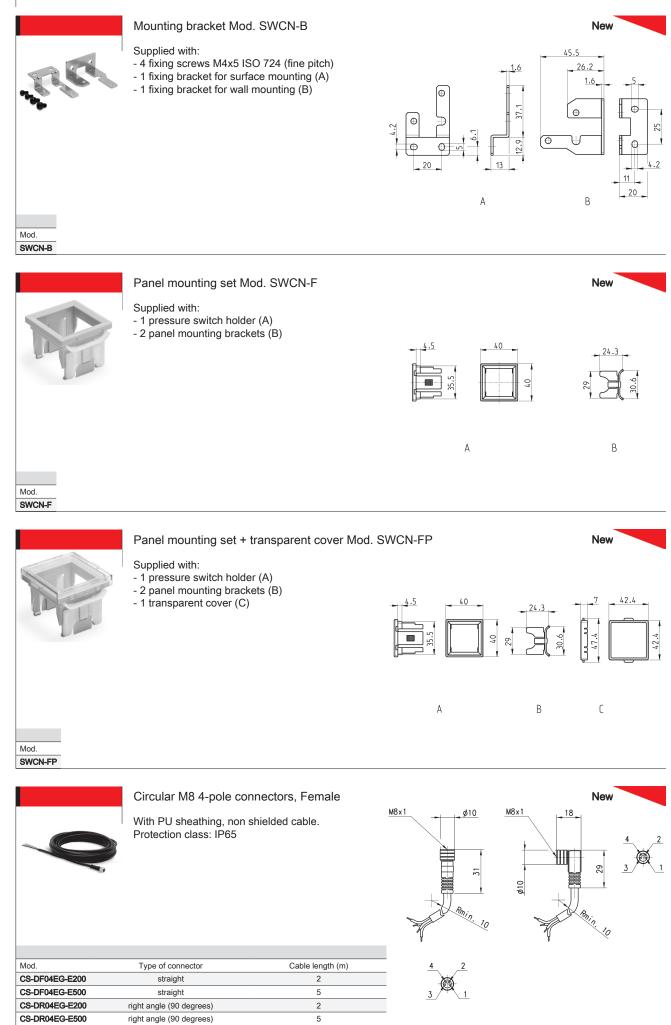



### Example of mounting with bracket Mod. SWCN-B and standard accessories



A: ADDITIONAL POWER SUPPLY In case of use, please unscrew plug A from one side and mount it on the other one.

B: Use of the AIR FILTER TUBE to reach the IP 65 protection class.

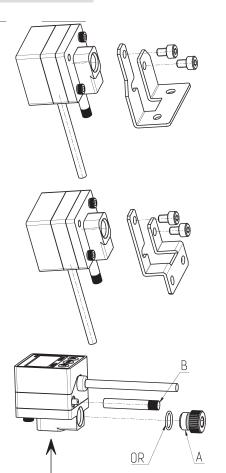




- A = PANEL MOUNTING SET MOD. SWCN-F B = PRESSURE SWITCH MOD. SWCN-...
- C = PANEL

A В ſ

New



2