

## New

## Activated carbon filters Series MX

Ports G3/4 - G1 Modular Bowl with technopolymer cover and bayonet-type mounting



- » Removal of compressed air oil, liquid, and gas components through the active carbons
- » Air quality conforming to ISO 8573-1 standard, up to class 1.7.1
- » Bowl locking mechanism reducing the risk of accidents

The Series MX has been realized to offer a multi-sector solution that guarantees saving in terms of installation time, space and costs. A special configurator, available on Camozzi website at http://catalogue. camozzi.com (sec. Configurators), allows the customer to choose the most suitable solution for his application, selecting single components or by configuring assembled FRLs.

MX3 is the new series of air treatment components realized by Camozzi, characterized by a modern, linear and compact design, offering high performances. The perfect integration between metal alloys and technopolymers has allowed the realization of a reliable product, light and strong at the same time. Thanks to a new concept of modularity, moreover, the mounting of components has become easier.

## **GENERAL DATA**


Construction	modular, compact with filtering element in HDPE
Materials	see TABLE OF MATERIALS (pag. 3/1.15.02)
Ports	G3/4 - G1
Weight	0,8 kg
Mounting	vertical in-line wall-mounting (by means of clamps)
Operating temperature	$10^{\circ}C \div 40^{\circ}C$ (t max = $60^{\circ}C$ )
Draining of condensate	NO DRAINING
Operating pressure	0,3 ÷ 16 bar
Nominal flow	see FLOW DIAGRAMS (pag. 3/1.15.03)
Filtering element	active carbon
Residual oil content	< 0,003 mg/m <sup>3</sup>
Fluid	compressed air
Pre-filtering	it is recommended to use a filter with residual oil of 0,01mg/m <sup>3</sup>

CODING EXAMPLE



MX	3	-	3/4	-	FCA
MX	SERIES				
3	SIZE: 3 = G3/4 - G1				
3/4	PORT: 3/4 = G3/4 1 = G1				
FCA	ACTIVATED CARBON FILTE	R			

For the assembly of a single component with fixing flanges or wall-mounting, see the section "FRL Series MX Assembled" (pag. 3/1.50.01)

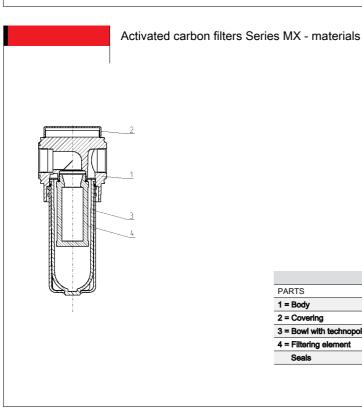


PARTS	MATERIALS			
1 = Body	Aluminium			
2 = Covering	Polyacetal			
3 = Bowl with technopolymer cover	Polycarbonate/Polyamide			
4 = Filtering element	Active carbon			
Seals	NBR			

New




## FLOW DIAGRAMS

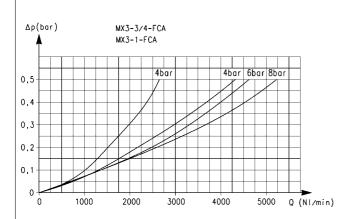

 $\Delta p$  = Pressure drop Q = Flow

Activated carbon	filters Series	MX - dimensions
------------------	----------------	-----------------







Mod.	A	С	G	I	M	N	0	R	S	T
MX3-3/4-FCA	G3/4	89,5	61,5	76	107	222	123	99,0	177,5	44,5
MX3-1-FCA	G1	89,5	61,5	76	107	222	123	99,0	177,5	44,5