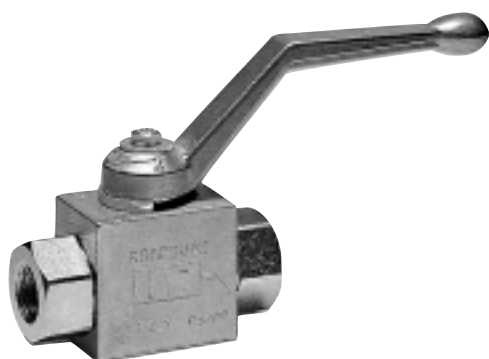
**ESEMPIO D'ORDINAZIONE**

Dimensione 03 - Attacchi filettati 1/2 GAS

RSAP2V03**ORDERING CODE EXAMPLE**

03 Dimension - 1/2 GAS Port thread

RSAP2V03**Applicazione**

Sono utilizzati per aprire o chiudere completamente il flusso di olio nell'impianto ruotando anche con la massima pressione. Non ammettono trafilamenti.

Montaggio

Collegare indifferentemente le due bocche al ramo da intercettare.

Funzionamento

Con la leva in pos.1 il flusso passa liberamente.

Con la leva in pos.2 il flusso è completamente bloccato.

A richiesta

Zincatura nera - Cromatura - Zincatura verde - Fori di fissaggio - Leve speciali - Filetti metrici - Attacchi DIN 2353 - Attacchi maschio.

NOTE COSTRUTTIVE

Corpo in acciaio zincato - Non ammette trafilamenti - Ruota in pressione.

Application

Ball valves are used to close or to open the flow.

Ball valves can turn between open or closed position under max pressure too and doesn't accept any leakage

Instruction

Pressure flow and actuator are connected with valve ports.

Operation

Flow crosses the valve in free way when hand lever is in pos.1.

Flow is closed when hand lever is in pos.2.

Optional

Black zinc plated - Chromium plated - Green zinc plated - Fixed holes - Special hand lever - Metric thread - Male thread - DIN2353 fittings port thread.

FEATURES

Steel body - Yellow zinc plated - Any leakage - Turn with max pressure too.

Codice d'ordinazione - Ordering code

RSAP2V


Dimensione/Dimension			
	GAS	NPT	SAE
01	1/4	1/4	
015			9/16-18
02	3/8	3/8	3/4-16
03	1/2	1/2	7/8-14
04	3/4	3/4	1 1/16-12
05	1	1	1 5/16-12
06	1 1/4	1 1/4	1 7/8-12
07	1 1/2	1 1/2	2-12

Tipo Filetto/Port Type	
	GAS
N	NPT
S	SAE

Caratteristiche-Rating

Dimensione/Dimension		01	015	02	03	04	05	06	07
Pressione max/Max Pressure	bar	500	500	500	500	350	350	280	220
Portata max/Max Flow	l/min	15	15	30	60	80	125	125	125
Diametro nominale/Nominal Diameter	mm	6	6	10	13	20	25	25	25

N.B.: per l'utilizzo di altri parametri vogliate consultarci
Note: where measurements are critical request certified drawings

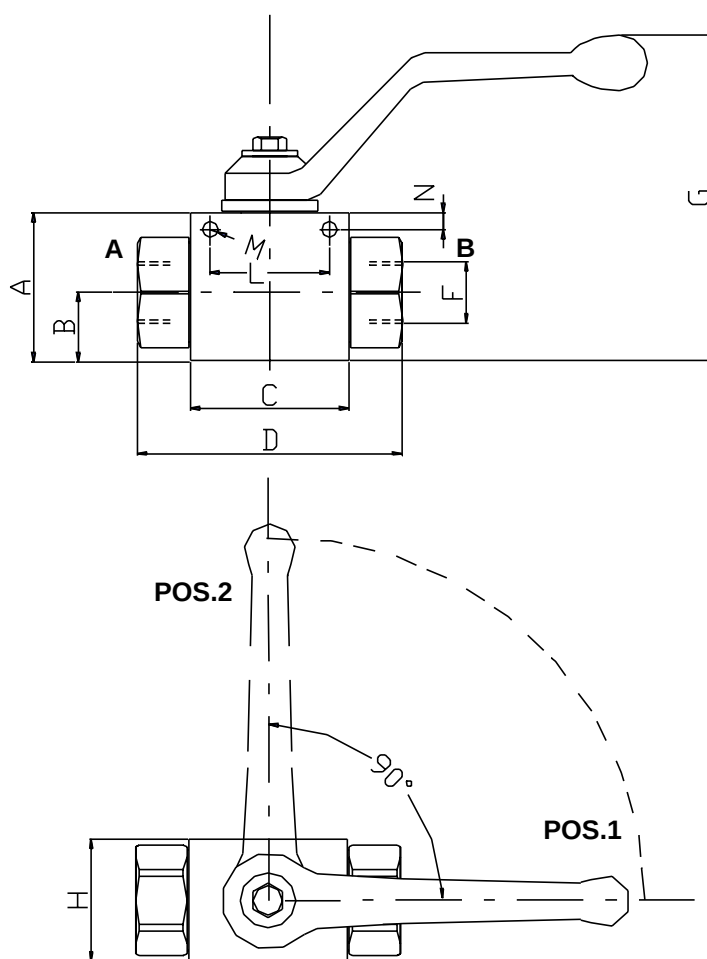

Fori di fissaggio a richiesta - Fixed holes on request

Dimensioni e pesi - External dimension and weight

Dimensione/Dimension	A	B	C	D	E	F GAS	F NPT	F SAE	G	H	L	M	N	Peso Weight kg
01	35	14.5	36	68	103	1/4	1/4		78	25	25	4.2	7.5	0.32
015	35	14.5	36	68	103			9/16-18	78	25	25	4.2	7.5	0.32
02	40	18	43	72	103	3/8	3/8	3/4-16	83	30	36	5.2	4	0.48
03	45	22	47	84	103	1/2	1/2	7/8-14	88	35	36	5.2	4	0.66
04	60	27	62	98	181	3/4	3/4	11/16-12	106	50	45	6.5	6.5	1.54
05	60	25.5	68	112	181	1	1	15/16-12	106	60	45	6.5	6.5	1.98
06	60	25.5	68	126	181	1 1/4	1 1/4	1 5/8-12	106	60	45	6.5	6.5	2.02
07	60	25.5	68	144	181	1 1/2	1 1/2	1 7/8-12	106	60	45	6.5	6.5	2.13