


SPIRALI IN POLIAMMIDE PA12 BINATE POLYAMIDE PA12 TWIN SPIRALS

	Lunghezza Length				7,5 m		15 m		25 m		30 m	
Codice Code	D	d	De	Di	Lc	La	Lc	La	Lc	La	Lc	LA
	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
SB422LX	4	2	50	41	475	2500	950	5000	1580	8500	1900	10000
SB4252LX	4	2,5	50	41	475	2500	950	5000	1580	8500	1900	10000
SB4272LX	4	2,7	50	41	475	2500	950	5000	1580	8500	1900	10000
SB642LX	6	4	65	51	510	2500	1020	5000	1750	8500	2040	10000
SB862LX	8	6	90	72	515	2500	1030	5000	1750	8500	2060	10000
SB1082LX	10	8	104	82	530	2500	1060	5000	1830	8500	2120	10000
SB12102LX	12	10	128	102	525	2500	1050	5000	1750	8500	2100	10000
SB15122LX	15	12	184	152	525	2500	1050	5000	1750	8500	2100	10000
SB151252LX	15	12,5	184	152	525	2500	1050	5000	1750	8500	2100	10000

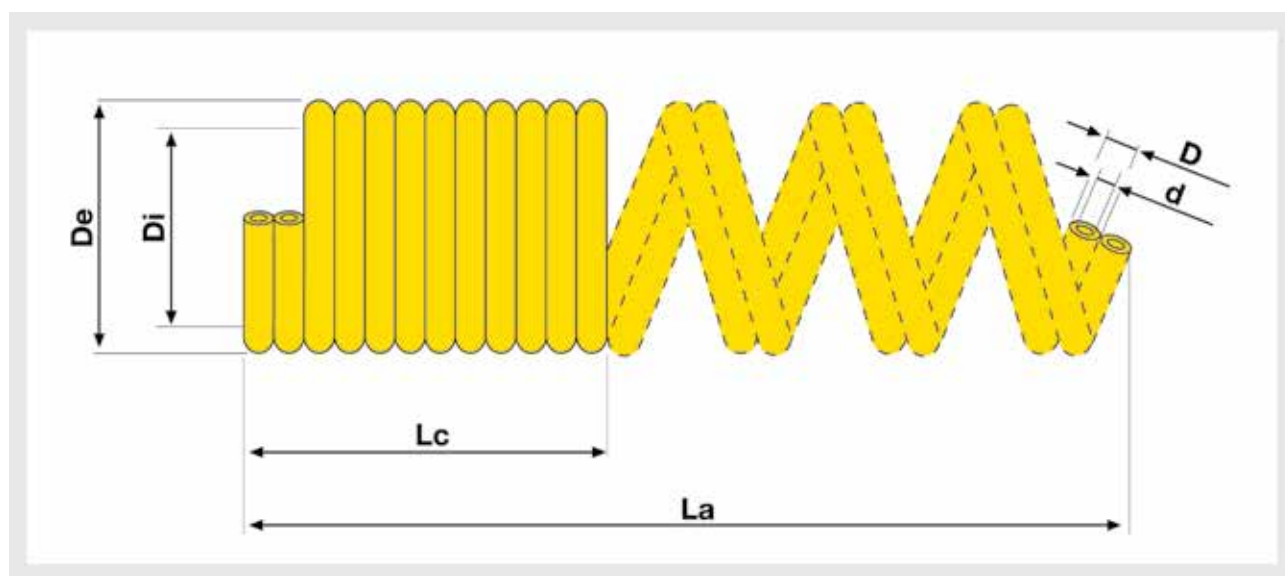

Queste spirali sono prodotte con tubi interni di diverso colore.

Il rivestimento esterno è in POLIURETANO NERO.

NB: Nel codice compare una X, bisogna sostituirla con la lunghezza.

ESEMPIO: Spirale in POLIAMMIDE PA12 BINATA 15x12

da 30 m - Cod. SB15122L30.

Temperature di utilizzo: da -20°C a +80°C.

Per fluidi a base acquosa temperatura massima di esercizio +70°C.

PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

This spirals can be made with internal tubes in the different colours. The external covering is made of BLACK POLYURETHANE.

NB: In the code there is an X, this must be replaced with the length of the spiral.

EXAMPLE: POLYAMIDE PA12 TWIN Spiral 15x12 in lengths of 30 m - Code SB15122L30.

Working temperature: from -20°C to +80°C.

Max. working temperature of fluids containing water +70°C.


PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.



SPIRALI IN POLIAMMIDE PA12

POLYAMIDE PA12 SPIRALS

	Lunghezza Length				5 m		7,5 m		10 m		12 m		15 m		20 m		24 m		30 m	
Codice Code	D	d	De	Di	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La
	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
SA42XY	4	2	50	42	136	2500	205	3750	273	5000	328	6000	410	7500	546	10000	656	12000	820	15000
SA64XY	6	4	64	52	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000
SA86XY	8	6	86	70	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000
SA108XY	10	8	102	82	175	2500	262	3750	350	5000	420	6000	525	7500	700	10000	840	12000	1050	15000
SA1210XY	12	10	126	102	175	2500	262	3750	350	5000	420	6000	525	7500	700	10000	840	12000	1050	15000

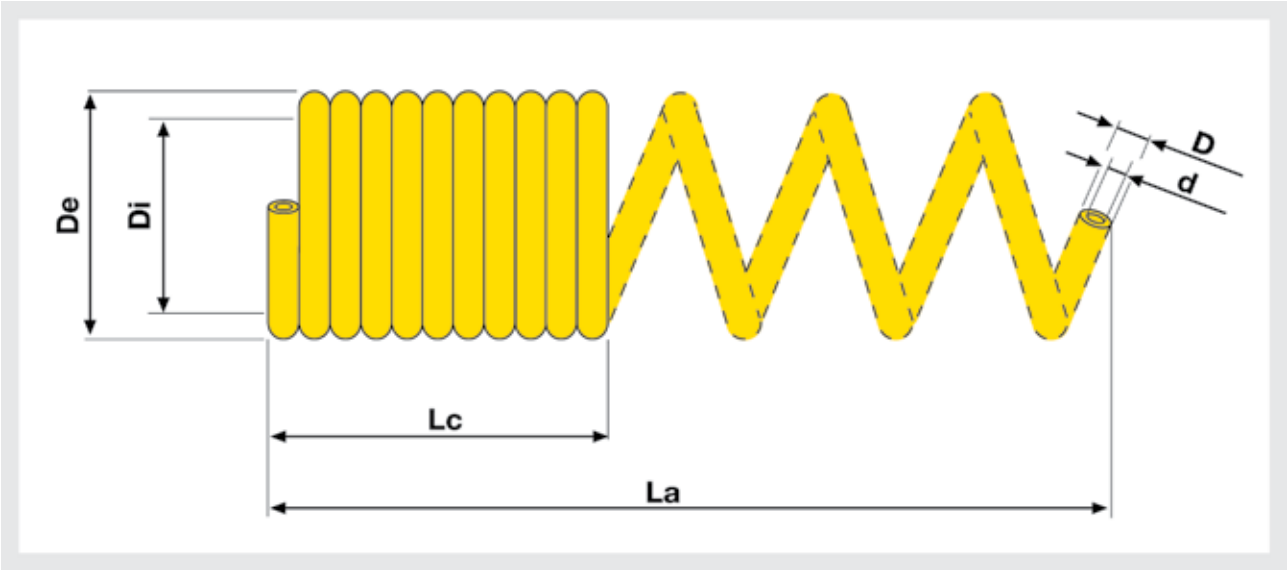


NB: Nel codice compare una X, bisogna sostituirla con la lettera del colore desiderato: BLU (B), ed ARANCIO (A), a richiesta altri colori; ed una Y, che corrisponde alla lunghezza della spirale.
ESEMPIO CODICE: Cod. SA15125B10 - Spirale PA12 15x12,5 BLU da 10 m.
Temperature di utilizzo: da -20°C a +80°C.
Per fluidi a base acquosa temperatura massima di esercizio +70°C.
PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

NB: There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), with other colours on request; and a Y, which corresponds to the length of the spiral.
CODE EXAMPLE: SA15125B10 - PA12 Spiral 15x12,5 BLUE in lengths of 10 m.
Working temperature: from -20°C to +80°C.
Max. working temperature of fluids containing water +70°C.
PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.



SPIRALI IN POLIAMMIDE PA12 CON TERMINALI DIRITTI POLYAMIDE PA12 SPIRALS WITH STRAIGHT TERMINALS

	Lunghezza Length						5 m			7,5 m			10 m			12 m			15 m			30 m		
Codice Code	D	d	De	Di	Lt1	Lt2	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1
	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
SCA42XY	4	2	50	42	150	150	120	420	2500	190	490	3750	258	558	5000	313	613	6000	395	695	7500	805	1105	15000
SCA64XY	6	4	64	52	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000
SCA86XY	8	6	86	70	150	150	146	446	2500	230	530	3750	313	613	5000	380	680	6000	480	780	7500	980	1280	15000
SCA108XY	10	8	102	82	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000
SCA1210XY	12	10	126	102	150	150	155	455	2500	242	542	3750	330	630	5000	400	700	6000	505	805	7500	1030	1330	15000

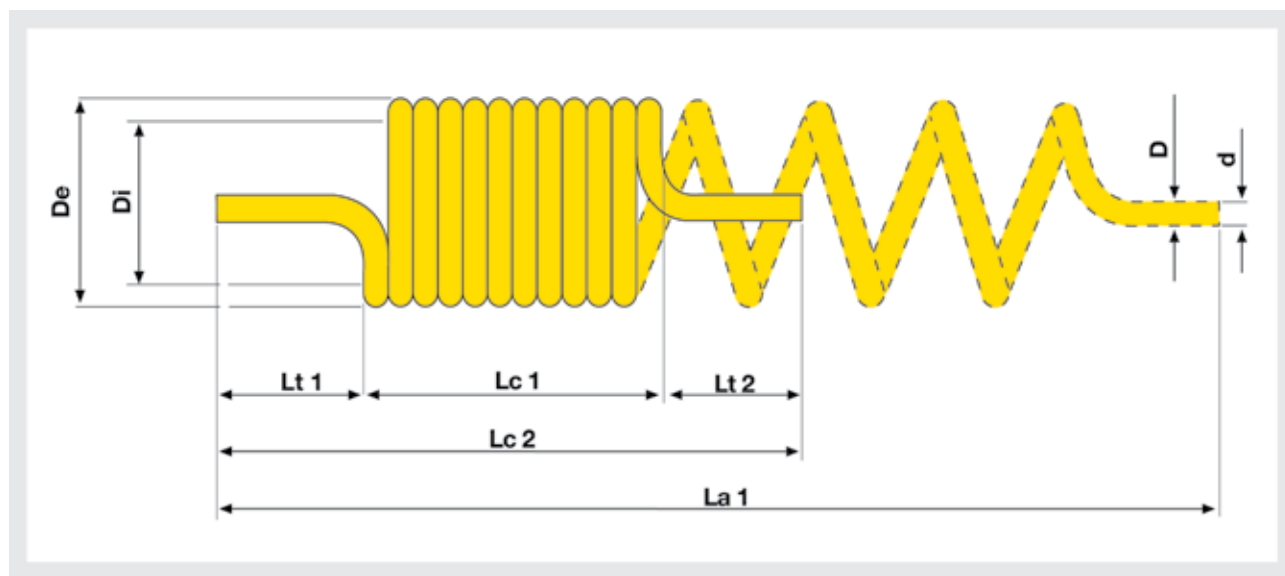

NB: Nel codice compare una X, bisogna sostituirla con la lettera del colore desiderato: BLU (B), ed ARANCIO (A), a richiesta altri colori; ed una Y, che corrisponde alla lunghezza della spirale.

ESEMPIO CODICE: SCA1210A15 - Spirale PA12 con codoli 12x10 ARANCIO da 15 m.

Temperature di utilizzo: da -20°C a +70°C.

Per fluidi a base acquosa temperatura massima di esercizio +70°C.

PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

NB: There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), with other colours on request; and a Y, which corresponds to the length of the spiral.

CODE EXAMPLE: SCA1210A15 - PA12 Spiral with straight terminals 12x10 ORANGE in lengths of 15 m.

Working temperature: from -20°C to +80°C.


Max. working temperature of fluids containing water +70°C.

PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.



SPIRALI IN POLIAMMIDE PA12 CON TERMINALI DIRITTI PER TIMONI AUTOCARRI - DIN 74324 **POLYAMIDE PA12 SPIRALS WITH STRAIGHT TERMINALS FOR TRUCKSDRAWBAR - DIN 74324**

Codice Code	D	d	De	Di	Lt1	Lt2	N° Spire N° Turns
	mm.	mm.	mm.	mm.	mm.	mm.	
SCA129X7P25	12	9	96	70	150	2500	7
SCA129X7M25	12	9	105	80	150	2500	7
SCA129X7G25	12	9	115	90	150	2500	7

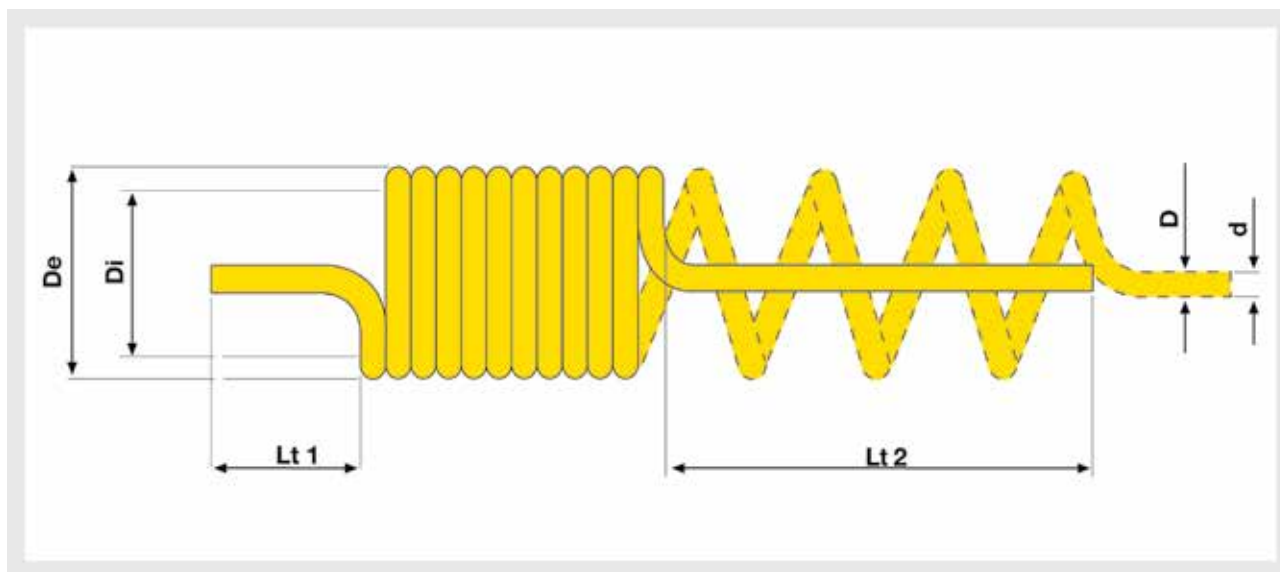

NB: Nel codice compare una X, bisogna sostituirla con la lettera del colore desiderato: NERO (N), BLU (B), ROSSO (R) e GIALLO (G).
ESEMPIO CODICE: Cod. SCA129N7P25 - Spirale timone autocarro in Poliammide12 12x9 NERO da 7 spire.

Queste spirali, su richiesta del cliente, possiamo fornirle raccordate con attacco maschio 16x1,5 - cod. SCAR129X7P25.
Temperature di utilizzo: da -40°C a +80°C.

Per fluidi a base acquosa temperatura massima di esercizio +70°C.

PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

There is an X in the code. This should be replaced with the letter representing the colour required: BLACK (N), BLUE (B), RED (R) and YELLOW (G).

CODE EXAMPLE: SCA129N7P25 - Polyamide12 trucksdrawbar spiral BLACK 12X9 with 7 turns.

On request we can supply the spirals with a male fitting of 16X1,5 cod. SCAR129X7P25

Working temperature: from -40°C to +80°C.

Max. working temperature of fluids containing water +70°C.

PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.




SPIRALI IN POLIAMMIDE PA12 CON TERMINALI DIRITTI PER AUTOCARRI DIN 74323

POLYAMIDE PA12 SPIRALS WITH STRAIGHT TERMINALS FOR TRUCKS DIN 74323

Codice Code	D	d	De	Lt 1-Lt 2	N° Spire N° Turns
* SCA128X21	12	8	100	150	21
* SCA128X18	12	8	115	150	18
SCA129X21	12	9	100	150	21
SCA129X18	12	9	115	150	18
* SCA1612X17	16	12	145	150	17

* Misura non prevista dalla Norma DIN 74323, tubo conforme alla Norma DIN 74324 e DIN 73378.

* Measurement not provided foreseen by the Norm DIN 74323, the tube meets the Norm DIN 74234 and DIN 73378.

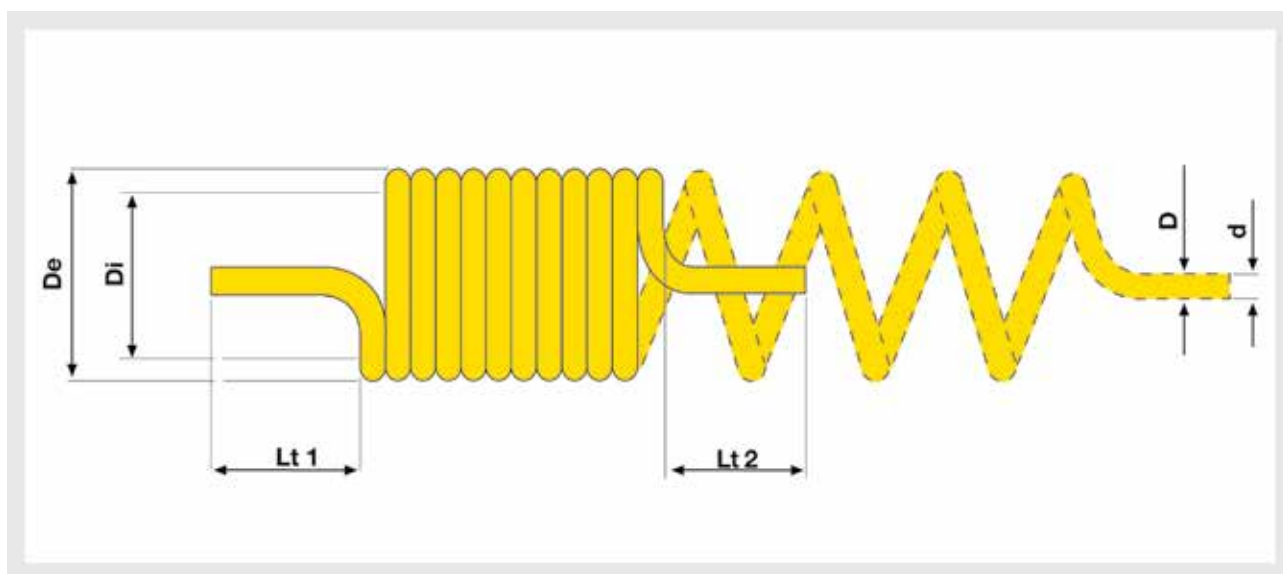

NB: Nel codice compare una X, bisogna sostituirla con la lettera del colore desiderato: NERO (N), BLU (B), ROSSO (R) e GIALLO (G).

ESEMPIO CODICE: Cod. SCA129N21 - Spirale autocarro in Poliammide12 12x9 NERO da 21 spire.

Queste spirali, su richiesta del cliente, possiamo fornirle raccordate con attacco maschio 16x1,5 - cod. SCAR129X21 - SCAR129X18.

Temperature di utilizzo: da -40°C a +80°C.

Per fluidi a base acquosa temperatura massima di esercizio +70°C.

PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

There is an X in the code. This should be replaced with the letter representing the colour required: BLACK (N), BLUE (B), RED (R) and YELLOW (G).

CODE EXAMPLE: SCA129N21 - Polyamide12 truck spiral BLACK 12X9 with 21 turns.

On request we can supply the spirals with a male fitting of 16X1,5 cod. SCAR129X21 - SCAR129X18.

Working temperature: from -40°C to +80°C.

Max. working temperature of fluids containing water +70°C.

PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.

