


SPIRALI IN POLIURETANO POLYURETHANE SPIRALS

Codice Code	Lunghezza Length				7,5 m		10 m		15 m		30 m	
	D	d	De	Di	Lc	La	Lc	La	Lc	La	Lc	La
	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
SP42BY	4	2	38	30	---	---	---	---	545	7500	1090	15000
SP64BY	6	4	42	30	405	3750	540	5000	810	7500	---	---
SP64BY	6	4	56	44	---	---	---	---	---	---	1130	15000
SP85BY	8	5	46	30	525	3750	700	5000	1050	7500	---	---
SP86BY	8	6	76	60	---	---	---	---	605	7500	1210	15000
SP1065BY	10	6,5	60	40	500	3750	670	5000	1000	7500	---	---
SP1075BY	10	7,5	105	85	---	---	---	---	525	7500	1050	15000
SP128BY	12	8	84	60	420	3750	560	5000	840	7500	---	---
SP129BY	12	9	124	100	---	---	---	---	525	7500	1050	15000
SP1610BY	16	10	92	60	525	3750	700	5000	1050	7500	---	---

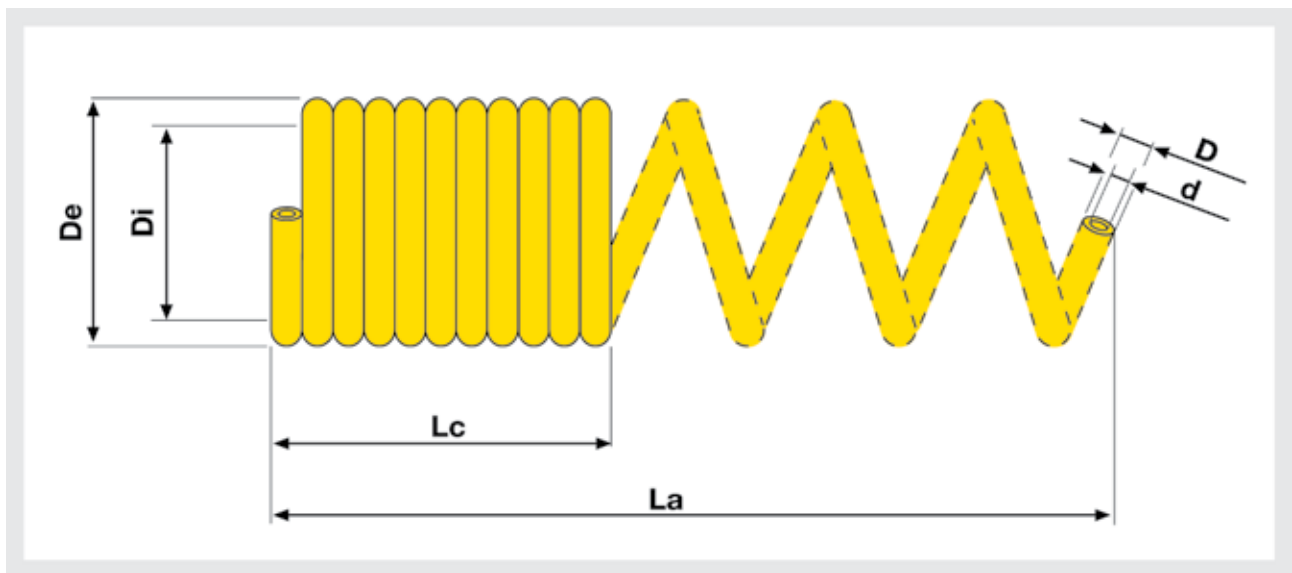

Queste spirali sono previste nel colore BLU (B), a richiesta altri colori. Nel codice compare una Y, che corrisponde alla lunghezza della spirale.

ESEMPIO CODICE: SP129B30 - Spirale POLIURETANO 12x9 BLU da 30 m.

Temperature di utilizzo: da -20°C a $+60^{\circ}\text{C}$.

PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

This spirals are available only in BLUE (B), or other colours on request. In the code there is an Y, which corresponds to the length of the spiral.

CODE EXAMPLE: SP129B30 - POLYURETHAN 12x9 BLUE Spiral in lengths of 30 m.

Working temperature: from -20°C to $+60^{\circ}\text{C}$.

PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.




SPIRALI IN POLIURETANO CON TERMINALI DIRITTI E RACCORDI

POLYURETHANE SPIRALS WITH STRAIGHT TERMINALS AND FITTINGS

Codice Code	Lunghezza Length						5 m			7,5 m			10 m			15 m		
	D	d	De	Di	Lt1	Lt2	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1
	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
SPCR64BY	6	4	42	30	150	150	250	550	2500	380	680	3750	515	815	5000	780	1080	7500
SPCR85BY	8	5	46	30	150	150	315	615	2500	480	780	3750	650	950	5000	980	1280	7500
SPCR1065BY	10	6,5	60	40	150	150	300	600	2500	460	760	3750	620	920	5000	940	1240	7500
SPCR128BY	12	8	84	60	150	150	250	550	2500	385	685	3750	515	815	5000	780	1080	7500
SPCR1610BY	16	10	92	60	150	150	315	615	2500	485	785	3750	655	955	5000	990	1290	7500

6 x 4: maschio girevole 1/4"	6 x 4: 1/4" rotating male
8 x 5: maschio girevole 1/4"	8 x 5: 1/4" rotating male
10 x 6,5: maschio girevole 1/4"	10 x 6,5: 1/4" rotating male
12 x 8: maschio girevole 3/8"	12 x 8: 3/8" rotating male
16 x 10: maschio girevole 3/8"	16 x 10: 3/8" rotating male

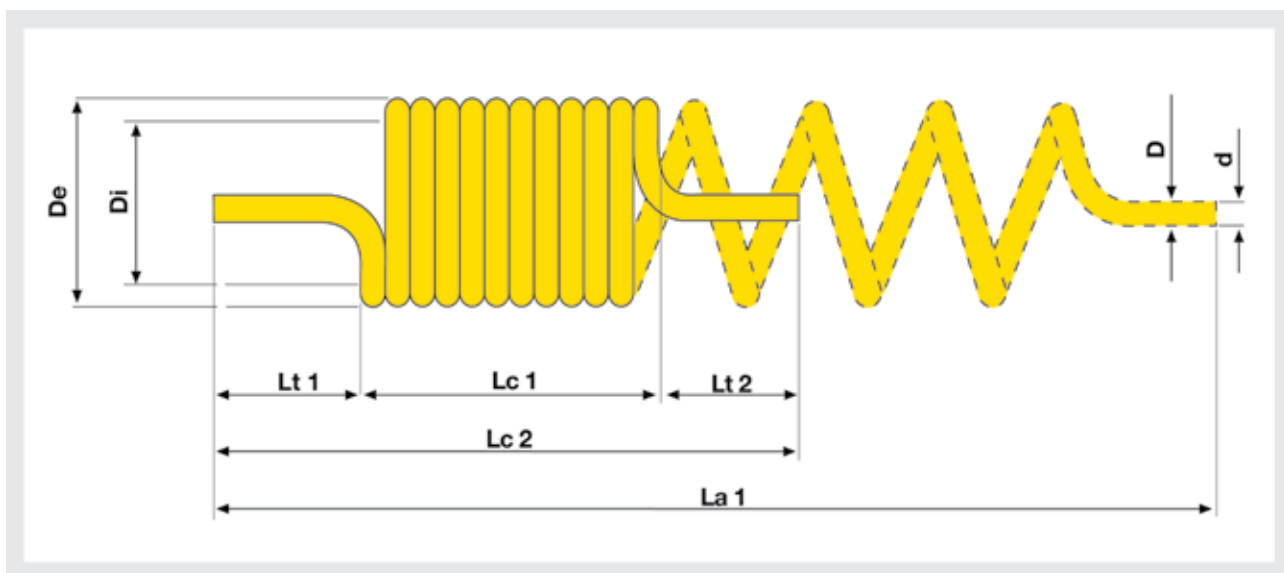

SPIRALI IN POLIURETANO CON TERMINALI DIRITTI

POLYURETHANE SPIRALS WITH STRAIGHT TERMINALS

Codice Code	Lunghezza Length						5 m			7,5 m			10 m			15 m		
	D	d	De	Di	Lt1	Lt2	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1	Lc1	Lc2	La1
	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
SPC64BY	6	4	42	30	150	150	250	550	2500	380	680	3750	515	815	5000	780	1080	7500
SPC85BY	8	5	46	30	150	150	315	615	2500	480	780	3750	650	950	5000	980	1280	7500
SPC1065BY	10	6,5	60	40	150	150	300	600	2500	460	760	3750	620	920	5000	940	1240	7500
SPC128BY	12	8	84	60	150	150	250	550	2500	385	685	3750	515	815	5000	780	1080	7500
SPC1610BY	16	10	92	60	150	150	315	615	2500	485	785	3750	655	955	5000	990	1290	7500

Queste spirali sono previste nel colore BLU (B), a richiesta altri colori. Nel codice compare una Y, che corrisponde alla lunghezza della spirale.

ESEMPIO CODICE: SPC1065B10 - Spirale POLIURETANO con codoli 10x6,5 BLU da 10 m.

Temperature di utilizzo: da -20°C a +60°C.

PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente

This spirals are available only in BLUE (B), or other colours on request. In the code there is an Y, which corresponds to the length of the spiral.

CODE EXAMPLE: SPC1065B10 - Spirale POLYURETHANE 10x6,5 with straight terminals BLUE in lengths of 10 m.

Working temperature: from -20°C to +60°C.

PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.