

M12510


JIC MALE 37° CONE - SAE J516/J514
JIC MACHO ASIENTO A 37° - SAE J516/J514

PART. REF.	HOSE BORE			THREAD	DIMENSIONS mm					
	DN	inch	Size	T	B	A	C		H _i	
M12510-04-04	6	1/4"	- 04	7/16" - 20	4,0	28,0	14,0		12	
M12510-04-05	6	1/4"	- 04	1/2" - 20	5,5	29,0	14,0		14	
M12510-04-06	6	1/4"	- 04	9/16" - 18	7,0	29,0	14,0		17	
M12510-05-05	8	5/16"	- 05	1/2" - 20	5,5	29,0	14,0		14	
M12510-05-06	8	5/16"	- 05	9/16" - 18	7,0	29,0	14,0		17	
M12510-06-06	10	3/8"	- 06	9/16" - 18	7,0	29,6	14,0		17	
M12510-06-08	10	3/8"	- 06	3/4" - 16	9,3	34,1	16,5		19	
M12510-06-10	10	3/8"	- 06	7/8" - 14	12,5	38,6	19,5		24	
M12510-08-06	12	1/2"	- 08	9/16" - 18	7,0	32,0	14,0		19	
M12510-08-08	12	1/2"	- 08	3/4" - 16	9,3	34,4	16,5		19	
M12510-08-10	12	1/2"	- 08	7/8" - 14	12,5	38,9	19,5		24	
M12510-08-12	12	1/2"	- 08	1.1/16" - 12	15,0	42,9	22,0		27	
M12510-10-10	16	5/8"	- 10	7/8" - 14	12,5	39,2	19,5		24	
M12510-10-12	16	5/8"	- 10	1.1/16" - 12	15,0	42,7	22,0		27	
M12510-12-10	19	3/4"	- 12	7/8" - 14	12,5	41,5	19,5		27	
M12510-12-12	19	3/4"	- 12	1.1/16" - 12	15,0	44,0	22,0		27	
M12510-12-14	19	3/4"	- 12	1.3/16" - 12	16,0	44,5	22,5		32	
M12510-12-16	19	3/4"	- 12	1.5/16" - 12	19,8	47,0	23,0		34	
M12510-16-12	25	1"	- 16	1.1/16" - 12	15,0	44,8	22,0		32	
M12510-16-16	25	1"	- 16	1.5/16" - 12	19,8	47,8	23,0		34	
M12510-16-20	25	1"	- 16	1.5/8" - 12	26,0	52,8	24,3		42	
M12510-20-20	31	1.1/4"	- 20	1.5/8" - 12	26,0	53,5	24,3		42	
M12510-20-24	31	1.1/4"	- 20	1.7/8" - 12	32,0	60,5	27,5		50	
M12510-24-24	38	1.1/2"	- 24	1.7/8" - 12	32,0	60,5	27,5		50	
M12510-32-32	51	2"	- 32	2.1/2" - 12	42,0	71,8	34,0		65	

SAE STANDARD CONNECTIONS


M22512

JIC FEMALE 37° CONE SEAT - SAE J516/J514 (THRUST-WIRE NUT)
JIC HEMBRA ASIENTO A 37° - SAE J516/J514 (TUERCA CON SEGURO)



M22513


JIC FEMALE 37° CONE SEAT - SAE J516/J514 (SLIP-ON NUT)
JIC HEMBRA ASIENTO A 37° - SAE J516/J514 (TUERCA LIBRE)



PART. REF.	HOSE BORE		THREAD		DIMENSIONS mm					
------------	-----------	--	--------	--	------------------	--	--	--	--	--

	DN	inch	Size	T	B	A	C			H ₂
M22513-03-04	5	3/16"	- 03	7/16" - 20	3,0	15,1	9,0			15
M22512-04-04	6	1/4"	- 04	7/16" - 20	4,0	15,5	8,2			17
M22512-04-05	6	1/4"	- 04	1/2" - 20	4,0	15,8	9,2			17
M22513-04-06	6	1/4"	- 04	9/16" - 18	4,0	16,5	9,8			19
M22512-05-05	8	5/16"	- 05	1/2" - 20	5,5	16,0	9,2			17
M22512-05-06	8	5/16"	- 05	9/16" - 18	7,0	15,7	9,7			19
M22513-05-08	8	5/16"	- 05	3/4" - 16	5,5	16,7	10,7			22
NEW M22512-06-05	10	3/8"	- 06	1/2" - 20	5,5	16,6	9,5			17
M22512-06-06	10	3/8"	- 06	9/16" - 18	7,0	16,1	9,2			19
M22513-06-08	10	3/8"	- 06	3/4" - 16	7,0	17,3	10,7			22
M22513-06-10	10	3/8"	- 06	7/8" - 14	9,3	18,1	12,4			27
M22512-08-08	12	1/2"	- 08	3/4" - 16	9,3	19,9	10,2			22
M22513-08-10	12	1/2"	- 08	7/8" - 14	9,3	18,5	12,4			27
M22513-08-12	12	1/2"	- 08	1.1/16" - 12	12,5	21,8	13,8			32
M22512-10-10	16	5/8"	- 10	7/8" - 14	12,5	19,9	12,3			27
M22513-10-12	16	5/8"	- 10	1.1/16" - 12	12,5	21,7	13,8			32
M22512-12-10	19	3/4"	- 12	7/8" - 14	12,5	21,5	12,3			27
M22512-12-12	19	3/4"	- 12	1.1/16" - 12	15,0	22,5	14,2			32
M22512-12-14	19	3/4"	- 12	1.3/16" - 12	15,0	23,1	14,8			36
M22512-12-16	19	3/4"	- 12	1.5/16" - 12	19,8	23,0	15,2			38
M22512-16-12	25	1"	- 16	1.1/16" - 12	15,0	23,3	14,4			32
M22512-16-16	25	1"	- 16	1.5/16" - 12	19,8	23,8	15,2			38
M22512-16-20	25	1"	- 16	1.5/8" - 12	26,0	29,8	16,2			50
M22512-20-20	31	1.1/4"	- 20	1.5/8" - 12	26,0	30,0	16,2			50
M22512-20-24	31	1.1/4"	- 20	1.7/8" - 12	32,0	35,0	18,8			60
M22512-24-24	38	1.1/2"	- 24	1.7/8" - 12	32,0	35,0	18,8			60
M22512-32-32	51	2"	- 32	2.1/2" - 12	44,0	35,4	24,0			75

SAE STANDARD CONNECTIONS



M22712

**JIC FEMALE 37° CONE SEAT DOUBLE EXAGON - SAE J516/J514
(THRUST-WIRE NUT)**

**JIC HEMBRA ASIENTO A 37° DOBLE TUERCA - SAE J516/J514
(TUERCA CON SEGURO)**


PART. REF.	HOSE BORE			THREAD	DIMENSIONS mm					
	DN	inch	Size	T	B	A	C		H ₁	H ₂
M22712-03-04	5	3/16"	- 03	7/16" - 20	4,0	20,5	8,2		12	17
M22712-04-04	6	1/4"	- 04	7/16" - 20	4,0	21,0	8,2		12	17
M22712-04-05	6	1/4"	- 04	1/2" - 20	4,0	21,5	9,2		12	17
M22712-04-06	6	1/4"	- 04	9/16" - 18	7,0	24,1	9,2		14	19
M22712-05-05	8	5/16"	- 05	1/2" - 20	5,5	21,5	9,2		14	17
M22712-05-06	8	5/16"	- 05	9/16" - 18	7,0	24,1	9,2		14	19
NEW M22712-05-08	8	5/16"	- 05	3/4" - 16	9,3	26,0	10,6		19	22
M22712-06-04	10	3/8"	- 06	7/16" - 20	4,0	24,5	8,2		17	17
M22712-06-05	10	3/8"	- 06	1/2" - 20	5,5	25,0	9,2		17	17
M22712-06-06	10	3/8"	- 06	9/16" - 18	7,0	24,6	9,2		17	19
M22712-06-08	10	3/8"	- 06	3/4" - 16	9,3	27,1	10,2		19	22
M22712-06-10	10	3/8"	- 06	7/8" - 14	12,5	28,0	12,3		22	27
M22712-08-06	12	1/2"	- 08	9/16" - 18	7,0	24,7	9,2		19	19
M22712-08-08	12	1/2"	- 08	3/4" - 16	9,3	27,4	10,2		19	22
M22712-08-10	12	1/2"	- 08	7/8" - 14	12,5	28,4	12,3		22	27
M22712-08-12	12	1/2"	- 08	1.1/16" - 12	14,0	30,0	14,2		27	32
M22712-10-08	16	5/8"	- 10	3/4" - 16	9,3	28,5	10,2		22	22
M22712-10-10	16	5/8"	- 10	7/8" - 14	12,5	29,0	12,3		22	27
M22712-10-12	16	5/8"	- 10	1.1/16" - 12	15,0	29,5	14,2		27	32
M22712-12-08	19	3/4"	- 12	3/4" - 16	9,3	30,0	10,2		27	22
M22712-12-10	19	3/4"	- 12	7/8" - 14	12,5	30,0	12,3		27	27
M22712-12-12	19	3/4"	- 12	1.1/16" - 12	15,0	31,5	14,2		27	32
M22712-12-14	19	3/4"	- 12	1.3/16" - 12	15,0	33,0	14,8		30	36
M22712-12-16	19	3/4"	- 12	1.5/16" - 12	19,8	32,5	15,2		32	38
M22712-16-12	25	1"	- 16	1.1/16" - 12	12,5	33,8	14,2		32	32
M22712-16-16	25	1"	- 16	1.5/16" - 12	19,8	34,3	15,2		32	38
M22712-16-20	25	1"	- 16	1.5/8" - 12	26,0	42,8	16,2		41	50
M22712-20-20	31	1.1/4"	- 20	1.5/8" - 12	26,0	43,5	16,2		41	50
M22712-24-24	38	1.1/2"	- 24	1.7/8" - 12	32,0	51,0	18,8		50	60
M22712-32-32	51	2"	- 32	2.1/2" - 12	42,0	55,5	24,0		65	75

SAE STANDARD CONNECTIONS

M22712K


JIC FEMALE 37° CONE SEAT DOUBLE EXAGON
COMPACT TYPE - SAE J516/J514 (THRUST-WIRE NUT)

JIC HEMBRA ASIENTO A 37° DOBLE TUERCA
TIPO COMPACTO - SAE J516/J514 (TUERCA CON SEGURO)

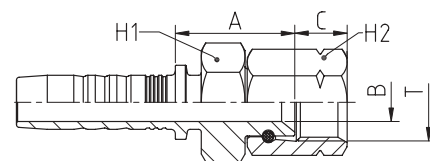

PART. REF.	HOSE BORE			THREAD	DIMENSIONS mm					
	DN	inch	Size	T	B	A	C		H ₁	H ₂
M22712-03-04K	5	3/16"	- 03	7/16" - 20	4,0	20,5	8,2		12	15
M22712-04-04K	6	1/4"	- 04	7/16" - 20	4,0	21,0	8,2		12	15
M22712-04-06K	6	1/4"	- 04	9/16" - 18	7,0	24,1	9,2		14	17
M22712-06-06K	10	3/8"	- 06	9/16" - 18	7,0	24,6	9,2		17	17
M22712-08-10K	12	1/2"	- 08	7/8" - 14	12,5	28,4	12,6		22	25
M22712-10-10K	16	5/8"	- 10	7/8" - 14	12,5	29,0	12,6		22	25


SAE STANDARD CONNECTIONS



M22592

90° JIC FEMALE SWEPT ELBOW 37° CONE SEAT - SAE J516/J514
(THRUST-WIRE NUT)

JIC HEMBRA CODO DE 90° ASIENTO A 37° - SAE J516/J514
(TUERCA CON SEGURO)



M22593

90° JIC FEMALE SWEPT ELBOW 37° CONE SEAT - SAE J516/J514
(SLIP-ON NUT)

JIC HEMBRA CODO DE 90° ASIENTO A 37° - SAE J516/J514
(TUERCA LIBRE)

PART. REF.	HOSE BORE	THREAD	DIMENSIONS mm
------------	-----------	--------	------------------


	DN	inch	Size	T	B	A	C	E	H ₂
M22593-03-04	5	3/16"	- 03	7/16" - 20	3,0	26,0	9,0	23,5	15
M22592-04-04	6	1/4"	- 04	7/16" - 20	4,0	28,5	8,2	27,0	17
M22592-04-05	6	1/4"	- 04	1/2" - 20	4,0	28,5	9,2	27,5	17
M22593-04-06	6	1/4"	- 04	9/16" - 18	4,0	29,5	9,8	28,0	19
NEW M22593-04-08	6	1/4"	- 04	3/4" - 16	7,0	29,3	11,0	30,5	22
M22592-05-05	8	5/16"	- 05	1/2" - 20	5,5	29,5	9,2	27,5	17
M22592-05-06	8	5/16"	- 05	9/16" - 18	7,0	31,0	9,2	28,5	19
NEW M22592-06-05	10	3/8"	- 06	1/2" - 20	5,5	30,1	9,5	26,5	17
M22592-06-06	10	3/8"	- 06	9/16" - 18	7,0	35,5	9,2	32,5	19
M22593-06-08	10	3/8"	- 06	3/4" - 16	7,0	36,5	10,7	29,5	22
M22593-06-10	10	3/8"	- 06	7/8" - 14	9,3	36,5	12,4	31,5	27
M22592-08-06	12	1/2"	- 08	9/16" - 18	7,0	37,0	9,2	33,0	19
M22592-08-08	12	1/2"	- 08	3/4" - 16	9,3	44,0	10,2	41,0	22
M22593-08-10	12	1/2"	- 08	7/8" - 14	9,3	45,0	12,4	36,0	27
M22593-08-12	12	1/2"	- 08	1.1/16" - 12	12,5	45,0	13,8	36,0	32
M22592-10-10	16	5/8"	- 10	7/8" - 14	12,5	53,5	12,3	52,5	27
M22593-10-12	16	5/8"	- 10	1.1/16" - 12	12,5	51,5	13,8	50,0	32
M22592-12-10	19	3/4"	- 12	7/8" - 14	12,5	55,0	12,3	52,5	27
M22592-12-12	19	3/4"	- 12	1.1/16" - 12	15,0	62,0	14,2	58,0	32
M22592-12-14	19	3/4"	- 12	1.3/16" - 12	15,0	62,0	14,8	58,0	36
M22592-12-16	19	3/4"	- 12	1.5/16" - 12	19,8	62,0	15,2	57,5	38
M22592-16-16	25	1"	- 16	1.5/16" - 12	19,8	77,0	15,2	67,0	38
M22592-16-20	25	1"	- 16	1.5/8" - 12	26,0	77,5	16,2	74,5	50
M22592-20-20	31	1.1/4"	- 20	1.5/8" - 12	26,0	90,5	16,2	86,5	50
M22592-20-24	31	1.1/4"	- 20	1.7/8" - 12	32,0	90,5	18,8	91,0	60
M22592-24-24	38	1.1/2"	- 24	1.7/8" - 12	32,0	108,0	18,8	100,5	60
M22592-32-32	51	2"	- 32	2.1/2" - 12	44,0	142,0	24,0	137,0	75

SAE STANDARD CONNECTIONS

M24792

**90° JIC FEMALE LONG DROP ELBOW 37° CONE SEAT - SAE J516/J514
(THRUST-WIRE NUT)**


JIC HEMBRA CODO LARGO DE 90° ASIENTO A 37° - SAE J516/J514
(TUERCA CON SEGURO)



M24793


**90° JIC FEMALE LONG DROP ELBOW 37° CONE SEAT - SAE J516/J514
(SLIP-ON NUT)**

JIC HEMBRA CODO LARGO DE 90° ASIENTO A 37° - SAE J516/J514
(TUERCA LIBRE)



PART. REF.	HOSE BORE			THREAD	DIMENSIONS mm					
	DN	inch	Size	T	B	A	C	E		H ₂
M24792-04-04	6	1/4"	- 04	7/16" - 20	4,0	28,5	8,2	45,0		17
M24792-04-05	6	1/4"	- 04	1/2" - 20	4,0	28,5	9,2	45,0		17
M24793-04-06	6	1/4"	- 04	9/16" - 18	4,0	29,5	9,8	55,5		19
M24792-06-06	10	3/8"	- 06	9/16" - 18	7,0	35,5	9,2	55,0		19
M24793-06-08	10	3/8"	- 06	3/4" - 16	7,0	36,5	10,7	61,5		22
M24792-08-08	12	1/2"	- 08	3/4" - 16	9,4	40,6	10,3	61,5		22
M24793-08-10	12	1/2"	- 08	7/8" - 14	9,4	45,0	12,4	65,0		27
M24792-10-10	16	5/8"	- 10	7/8" - 14	12,5	53,5	12,3	65,5		27
M24792-12-12	19	3/4"	- 12	1.1/16" - 12	15,0	62,0	14,2	94,5		32
M24792-16-16	25	1"	- 16	1.5/16" - 12	19,8	77,0	15,2	110,0		38


SAE STANDARD CONNECTIONS



M22542

**45° JIC FEMALE SWEPT ELBOW 37° CONE SEAT - SAE J516/J514
(THRUST-WIRE NUT)**

JIC HEMBRA CODO DE 45° ASIENTO A 37° - SAE J516/J514
(TUERCA CON SEGURO)



M22543

**45° JIC FEMALE SWEPT ELBOW 37° CONE SEAT - SAE J516/J514
(SLIP-ON NUT)**

JIC HEMBRA CODO DE 45° ASIENTO A 37° - SAE J516/J514
(TUERCA LIBRE)

PART. REF.	HOSE BORE	THREAD	DIMENSIONS mm
------------	-----------	--------	------------------


	DN	inch	Size	T	B	A	C	E		H ₂
M22542-04-04	6	1/4"	- 04	7/16" - 20	4,0	35,5	8,2	14,5		17
M22542-04-05	6	1/4"	- 04	1/2" - 20	4,0	35,7	9,2	14,5		17
M22543-04-06	6	1/4"	- 04	9/16" - 18	4,0	35,5	9,8	14,0		19
M22542-05-05	8	5/16"	- 05	1/2" - 20	5,5	37,5	9,2	14,5		17
M22542-05-06	8	5/16"	- 05	9/16" - 18	7,0	38,0	9,2	14,5		19
M22542-06-06	10	3/8"	- 06	9/16" - 18	7,0	42,0	9,2	16,5		19
M22543-06-08	10	3/8"	- 06	3/4" - 16	7,0	41,0	10,7	14,0		22
M22543-06-10	10	3/8"	- 06	7/8" - 14	9,3	42,5	12,4	15,5		27
M22542-08-08	12	1/2"	- 08	3/4" - 16	9,3	52,0	10,2	20,0		22
M22543-08-10	12	1/2"	- 08	7/8" - 14	9,3	49,5	12,4	17,0		27
M22543-08-12	12	1/2"	- 08	1.1/16" - 12	12,5	50,0	13,8	17,0		32
M22542-10-10	16	5/8"	- 10	7/8" - 14	12,5	62,0	12,3	25,5		27
M22543-10-12	16	5/8"	- 10	1.1/16" - 12	12,5	60,0	13,8	24,0		32
M22542-12-12	19	3/4"	- 12	1.1/16" - 12	15,0	70,0	14,2	27,5		32
M22542-12-14	19	3/4"	- 12	1.3/16" - 12	15,0	69,0	14,8	27,5		36
M22542-12-16	19	3/4"	- 12	1.5/16" - 12	19,8	70,0	15,2	27,5		38
M22542-16-12	25	1"	- 16	1.1/16" - 12	15,0	72,5	14,2	27,5		32
M22542-16-16	25	1"	- 16	1.5/16" - 12	19,8	86,0	15,2	32,0		38
M22542-16-20	25	1"	- 16	1.5/8" - 12	26,0	90,0	16,2	36,0		50
M22542-20-20	31	1.1/4"	- 20	1.5/8" - 12	26,0	103,5	16,2	41,5		50
M22542-20-24	31	1.1/4"	- 20	1.7/8" - 12	32,0	106,5	18,8	44,5		60
M22542-24-24	38	1.1/2"	- 24	1.7/8" - 12	32,0	119,0	18,8	46,5		60
M22542-32-32	51	2"	- 32	2.1/2" - 12	44,0	163,0	24,0	68,0		75

SAE STANDARD CONNECTIONS

M22582F

90° JIC FEMALE COMPACT ELBOW 37° CONE SEAT SAE J516/J514
(THRUST-WIRE NUT)

JIC HEMBRA CODO COMPACTO DE 90° ASIENTO A 37° - SAE J516/J514
(TUERCA CON SEGURO)



PART. REF.	HOSE BORE			THREAD	DIMENSIONS mm					
	DN	inch	Size	T	B	A	C	E	H ₁	H ₂
M22582-04-04F	6	1/4"	- 04	7/16" - 20	4,0	20,0	8,2	20,5	14	17
M22582-04-06F	6	1/4"	- 04	9/16" - 18	7,0	20,0	9,2	21,5	14	19
M22582-06-06F	10	3/8"	- 06	9/16" - 18	7,0	23,1	9,2	24,0	19	19
M22582-06-08F	10	3/8"	- 06	3/4" - 16	9,3	26,6	10,2	28,0	22	22
M22582-08-08F	12	1/2"	- 08	3/4" - 16	9,3	24,9	10,2	28,0	22	22
M22582-08-10F	12	1/2"	- 08	7/8" - 14	12,5	24,9	12,3	29,0	22	27
M22582-12-12F	19	3/4"	- 12	1.1/16" - 12	15,0	37,5	14,2	33,0	27	32
M22582-16-16F	25	1"	- 16	1.5/16" - 12	20,0	51,8	15,2	40,0	36	38